

ENVIRONMENTAL PRODUCT DECLARATION

in accordance with ISO 14025, ISO 21930 and EN 15804

Owner of the declaration:	NC Nordic Care AB
Program operator:	The Norwegian EPD Foundation
Publisher:	The Norwegian EPD Foundation
Declaration number:	NEPD-3581-2173-EN
Registration number:	NEPD-3581-2173-EN
ECO Platform reference number:	-
Issue date:	06.07.2022
Valid to:	06.07.2027

Jackie chair

NC Nordic Care AB

www.epd-norge.no



General information

Product: Jackie chair	Owner of the declaration: NC Nordic Care AB Contact person: Moa Ulfsson Phone: +46 140 38 40 60 e-mail: moa.u@ncnordiccare.se
Program operator: The Norwegian EPD Foundation Pb. 5250 Majorstuen, 0303 Oslo Phone: +47 23 08 80 00 e-mail: post@epd-norge.no	Manufacturer: NC Nordic Care AB
Declaration number: NEPD-3581-2173-EN	Place of production: NC Nordic Care AB Ydrevägen 23, Box 30 SE 573 21 Tranås Sweden
ECO Platform reference number:	Management system: ISO 9001, ISO 14001, ISO 45001, FSC® (C010544)
This declaration is based on Product Category Rules: CEN Standard EN 15804:2012+A1:2013 serves as core PCR NPCR 026:2018 Part B for furniture	Organisation no: 556249-9177
Statement of liability: The owner of the declaration shall be liable for the underlying information and evidence. EPD Norway shall not be liable with respect to manufacturer information, life cycle assessment data and evidences.	Issue date: 06.07.2022 Valid to: 06.07.2027
Declared unit: 1 Pcs Jackie chair	Year of study: 2021
Declared unit with option: A1,A2,A3,A4	Comparability: EPDs from programmes other than the Norwegian EPD Foundation may not be comparable
Functional unit: 1 psc, Jackie chair.	Development and verification of EPD: The declaration has been developed and verified using EPD tool lca.tools ver EPD2020.11, developed by LCA.no AS. The EPD tool is integrated into the company's environmental management system, and has been approved by EPD-Norway Developer of EPD: Moa Ulfsson Reviewer of company-specific input data and EPD: Jan Jismyr
General information on verification of EPD from EPD tools: Independent verification of data, other environmental information and the declaration according to ISO 14025:2010, § 8.1.3 and § 8.1.4. Individual third party verification of each EPD is not required when the EPD tool is i) integrated into the company's environmental management system, ii) the procedures for use of the EPD tool are approved by EPDNorway, and iii) the process is reviewed annually. See Appendix G of EPD-Norway's General Programme Instructions for further information on EPD tools.	Approved: Sign  Håkon Hauan, CEO EPD-Norge
Verification of EPD tool: Independent third party verification of the EPD tool, background data and test-EPD in accordance with EPDNorway's procedures and guidelines for verification and approval of EPD tools. Erik Svanes, Norsus AS (no signature required)	

Key environmental indicators	Unit	Cradle to gate A1 - A3
Global warming	kg CO2 eqv	18,67
Total energy use	MJ	466,73
Amount of recycled materials	%	18,56

Product

Market:

Mainly Europe, but is available world wide.

Product description:

Jackie is a versatile family of easy chairs, sofas and chairs with different features and sizes, as well as tactile materials for variety, while maintaining an overall harmonious look.

The Jackie chair has been designed to meet all the identified needs of a care chair. It is a suspendable, stackable and sound absorbent armchair for easier cleaning, versatile furnishing and a good acoustic environment when required.

It is available in different widths and heights to suit different individuals, has a stable and non-tip full-length armrest with a grip on the back for support.

For more information please visit our webpage:
<https://www.ncnordiccare.se/produkter/jackie-131/>

Technical data:

Total weight: 5,34 kg (packaging excluded)
 Total weight: 7,14 kg (packing included)

Reference service life, product

15 years service life, 5 years warrant if no other indicated.

Reference service life, building

Product specification

Jackie 131
 Stackable chair. Frame made of solid wood and seat and back in plywood and veneer.
 The chair are available in a few different materials and colours. This EPD is valid for the following options:
 - Frame in solid wood, available in birch (FSC Mix) or oak (FSC Mix).
 - Clear lacquer, stained black or white. Other colours on request.
 For other options, see variants.
 Read more under "additional information" on page 4

Materials	kg	%	Recycled share in material (kg)	Recycled share in material (%)
Wood - Solid beech/birch	3,70	66,07	0,00	0,00
Wood - Plywood	1,08	19,29	0,00	0,00
Glue for wood	0,21	3,75	0,00	0,00
Lacquer, water based	0,05	0,89	0,00	0,00
Wood - Veneer	0,56	10,00	0,00	0,05
Total:	5,60		0,00	
Packaging	kg		Recycled share in material (kg)	Recycled share in material (%)
Packaging - Cardboard	1,80		1,37	76,30
Total including packaging	7,4		1,37	

LCA: Calculation rules

Declared unit:

1 Pcs Jackie chair

Cut-off criteria:


All major raw materials and all the essential energy is included. The production processes for raw materials and energy flows with very small amounts (less than 1%) are not included. These cut-off criteria do not apply for hazardous materials and substances.

Data quality:

Specific data for the product composition are provided by the manufacturer. They represent the production of the declared product and were collected for EPD development in the year of study. Background data is based on registered EPDs according to EN 15804, Ostfold Research databases, ecoinvent and other LCA databases. The data quality of the raw materials in A1 is presented in the table below.

Materials	Source	Data quality	Year
Glue for wood	ecoinvent 3.4	Database	2017
Lacquer, water based	ecoinvent 3.4	Database	2017
Packaging - Cardboard	ecoinvent 3.4	Database	2017
Wood - Plywood	ecoinvent 3.4	Database	2017
Wood - Solid beech/birch	ecoinvent 3.4	Database	2017
Wood - Veneer	S-P-00172	EPD	2017
Glue for wood	NORSUS	Database	2020

System boundary:

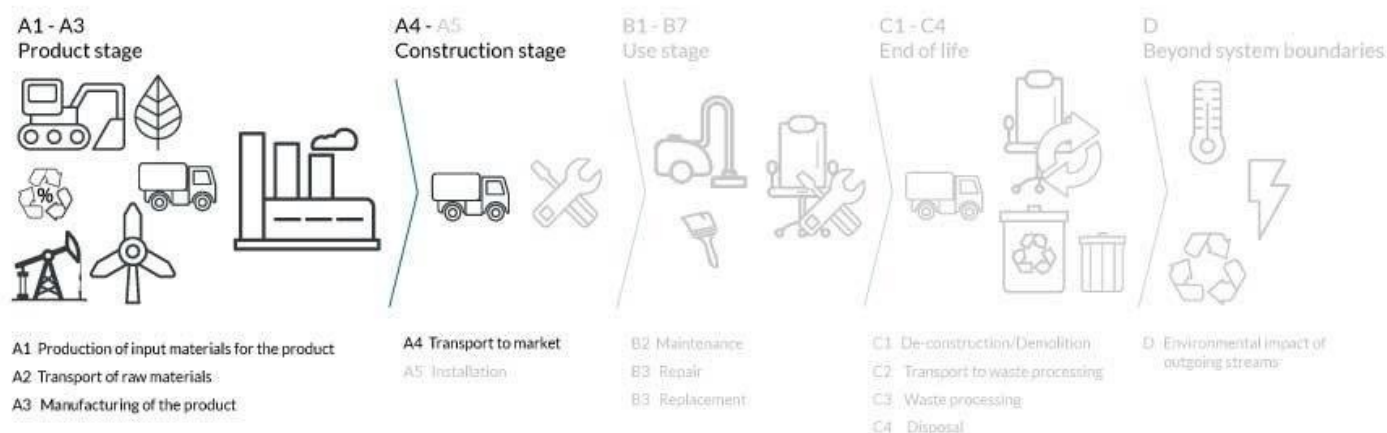

Additional technical information:

Jackie is tested according to EN 16139:2013 Furniture – Strength, durability and safety – Requirements for non-domestic seating. The product is FSC® -labelled in the following executions: Birch and oak.

Jackie has been certified according to Swedish Möbelfakta requirements. Möbelfakta is a type 1 eco-label according to ISO 14024 for furniture that considers both quality, environment, and responsible supply chains.
<https://www.mobelfakta.se/Details.html?id=1030>

Continue from page 3

Dimensions:

Height 83 cm

Width 50 cm

Depth 57 cm

Seat height 46 cm

Seat depth 38 cm

Variants

Jackie 131 with upholstered seat and back.

Fabric chosen by customer, HR-foam.

Dimensions:

Height 83 cm

Width 50 cm

Depth 57 cm

Seat height 46 cm

Seat depth 38 cm

Jackie 132

Stackable chair with armrests.

Dimensions:

Height 83 cm

Width 57 cm

Depth 57 cm

Seat height 46 cm

Seat depth 38 cm

Arm height 66 cm

Jackie 132 with upholstered seat and back.

Fabric chosen by customer, HR-foam.

Dimensions:

Height 83 cm

Width 57 cm

Depth 57 cm

Seat height 46 cm

Seat depth 38 cm

Arm height 66 cm

LCA: Scenarios and additional technical information

The following information describe the scenarios in the different modules of the EPD.

At our site in Tranås, we only use electricity from renewable sources. A4 transport includes transport from NC Nordic Care, Tranås to Kinnarp (140km).

Transport from production place to user (A4)

Type	Capacity utilisation (incl. return) %	Type of vehicle	Distance km	Fuel/Energy consumption	Unit	Value (l/t)
Truck	38,8 %	Truck, 16-32 tonnes, EURO 6	165	0,043626	l/tkm	7,20
Railway					l/tkm	
Boat	50,0 %	Ship, Ferry transport (kgkm)	400	0,033522	l/tkm	13,41
Other Transportation					l/tkm	

Assembly (A5)

	Unit	Value
Auxiliary	kg	
Water consumption	m ³	
Electricity consumption	kWh	
Other energy carriers	MJ	
Material loss	kg	
Output materials from waste treatment	kg	
Dust in the air	kg	
VOC emissions	kg	

Use (B1)

	Unit	Value

Maintenance (B2)/Repair (B3)

	Unit	Value
Maintenance cycle*		
Auxiliary		
Other resources		
Water consumption	m ³	
Electricity consumption	kWh	
Other energy carriers	MJ	
Material loss	kg	
VOC emissions	kg	

Replacement (B4)/Refurbishment (B5)

	Unit	Value
Replacement cycle*		
Electricity consumption	kWh	
Replacement of worn parts		

* Described above if relevant

Operational energy (B6) and water consumption (B7)

	Unit	Value
Water consumption	m ³	
Electricity consumption	kWh	
Other energy carriers	MJ	
Power output of equipment	kW	

End of Life (C1, C2)

	Unit	Value
Hazardous waste disposed	kg	
Collected as mixed construction waste	kg	
Reuse	kg	
Recycling		
Energy recovery		
To landfill	kg	

Transport to waste processing (C2)

Type	Capacity utilisation (incl. return) %	Type of vehicle	Distance km	Fuel/Energy consumption	Unit	Value (l/t)
Truck					l/tkm	
Railway					l/tkm	
Boat					l/tkm	
Other Transportation					l/tkm	

Scenarios after A1-A4 are not included

LCA: Results

The LCA results are presented below for the declared unit defined on page 2 of the EPD document.

System boundaries (X=included, MND=module not declared, MNR=module not relevant)

Product stage				Construction installation stage	User stage								End of life stage				Beyond the system boundaries
Raw materials	Transport	Manufacturing	Transport	Assembly	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal		Raise-Recovery-Recycling-potential
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	.	D
X	X	X	X	MND	MND	MND	MND	MND	MND	MND	MND	MND	MND	MND	MND	.	MND

Environmental impact

Parameter	Unit	A1	A2	A3	A4
GWP	kg CO ₂ -eq	3,03E+00	2,40E-01	1,54E+01	7,07E-01
ODP	kg CFC11 -eq	3,63E-07	4,51E-08	8,53E-07	1,27E-07
POCP	kg C ₂ H ₄ -eq	1,25E-03	3,74E-05	2,96E-03	2,34E-04
AP	kg SO ₂ -eq	1,33E-02	6,12E-04	7,42E-02	7,77E-03
EP	kg PO ₄ ³⁻ -eq	3,00E-03	7,91E-05	9,80E-03	9,46E-04
ADPM	kg Sb -eq	1,90E-05	7,38E-07	2,50E-05	1,47E-06
ADPE	MJ	4,45E+01	3,62E+00	1,71E+02	1,02E+01

GWP Global warming potential; ODP Depletion potential of the stratospheric ozone layer; POCP Formation potential of tropospheric photochemical oxidants; AP Acidification potential of land and water; EP Eutrophication potential; ADPM Abiotic depletion potential for non fossil resources; ADPE Abiotic depletion potential for fossil resources

Reading example: 9,0 E-03 = 9,0*10⁻³ = 0,009

*INA Indicator Not Assessed

Resource use

Parameter	Unit	A1	A2	A3	A4
RPEE	MJ	6,84E+01	5,32E-02	3,95E+01	1,24E-01
RPEM	MJ	1,13E+02	0,00E+00	0,00E+00	0,00E+00
TPE	MJ	1,82E+02	5,32E-02	3,95E+01	1,24E-01
NRPE	MJ	5,05E+01	3,70E+00	3,05E+02	1,04E+01
NRPM	MJ	2,39E-02	0,00E+00	0,00E+00	0,00E+00
TRPE	MJ	5,05E+01	3,70E+00	3,05E+02	1,04E+01
SM	kg	1,37E+00	0,00E+00	0,00E+00	0,00E+00
RSF	MJ	0,00E+00	0,00E+00	5,34E-03	0,00E+00
NRSF	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00
W	m ³	7,69E-02	6,97E-04	2,60E-01	1,65E-03

RPEE Renewable primary energy resources used as energy carrier; RPEM Renewable primary energy resources used as raw materials; TPE Total use of renewable primary energy resources; NRPE Non renewable primary energy resources used as energy carrier; NRPM Non renewable primary energy resources used as materials; TRPE Total use of non renewable primary energy resources; SM Use of secondary materials; RSF Use of renewable secondary fuels; NRSF Use of non renewable secondary fuels; W Use of net fresh water

Reading example: 9,0 E-03 = $9,0 \cdot 10^{-3}$ = 0,009

*INA Indicator Not Assessed

End of life - Waste

Parameter	Unit	A1	A2	A3	A4
HW	kg	7,08E-04	2,19E-06	3,58E-04	6,97E-06
NHW	kg	9,62E-01	1,97E-01	3,72E+00	4,07E-01
RW	kg	INA*	INA*	INA*	INA*

HW Hazardous waste disposed; NHW Non hazardous waste disposed; RW Radioactive waste disposed

Reading example: 9,0 E-03 = $9,0 \cdot 10^{-3}$ = 0,009

*INA Indicator Not Assessed

End of life - Output flow

Parameter	Unit	A1	A2	A3	A4
CR	kg	8,25E-02	0,00E+00	0,00E+00	0,00E+00
MR	kg	0,00E+00	0,00E+00	1,80E+00	0,00E+00
MER	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00
EEE	MJ	INA*	INA*	INA*	INA*
ETE	MJ	INA*	INA*	INA*	INA*

CR Components for reuse; MR Materials for recycling; MER Materials for energy recovery; EEE Exported electric energy; ETE Exported thermal energy

Reading example: 9,0 E-03 = $9,0 \cdot 10^{-3}$ = 0,009

*INA Indicator Not Assessed

Additional Norwegian requirements

Greenhouse gas emissions from the use of electricity in the manufacturing phase

National production mix from import, low voltage (production of transmission lines, in addition to direct emissions and losses in grid) of applied electricity for the manufacturing process (A3).

Electricity mix	Data source	Amount	Unit
El-mix, Sweden (kWh)	ecoinvent 3.4 Alloc Rec	42,67	g CO2-ekv/kWh
Energy, electricity, European average: 1 kWh	ecoinvent 3.4	594,20	g CO2-ekv/kWh

Dangerous substances

The product contains substances given by the REACH Candidate list and the Norwegian priority list that are less than 0,1 % by weight.

Indoor environment

The product is low-emitting and tested according to Swedish Möbelfakta.

Additional environmental information

Key environmental indicators for variants for this EPD: Cradle to Gate analyse from A1 to A3

Variant number	Global warming (kg CO2)	Total energy use (MJ)	Share of recycled material in product(%)
Jackie chair, upholstered	30,43	696,88	0,26
Jackie armchair	20,19	487,64	0,21
Jackie armchair, upholstered	31,97	717,98	0,27

Bibliography

ISO 14025:2010 Environmental labels and declarations - Type III environmental declarations - Principles and procedures.

ISO 14044:2006 Environmental management - Life cycle assessment - Requirements and guidelines.

EN 15804:2012+A1:2013 Environmental product declaration - Core rules for the product category of construction products.

ISO 21930:2017 Sustainability in buildings and civil engineering works - Core rules for environmental product declarations of construction products.

ecoinvent v3, Allocation, cut-off by classification, Swiss Centre of Life Cycle Inventories.

Iversen et al., (2018) eEPD v3.0 - Background information for EPD generator system. LCA.no report number 04.18

Vold et al., (2019) EPD generator for Norsk Industri, Background information for industry application and LCA data, LCA.no report number 06.19.

NPCR Part A: Construction products and services. Ver. 1.0. April 2017, EPD-Norge.

NPCR 026 Part B for Furniture. Ver. 2.0 October 2018, EPD-Norge.

 epd-norway Global Program Operator	Program operator and publisher The Norwegian EPD Foundation Post Box 5250 Majorstuen, 0303 Oslo, Norway	Phone: +47 23 08 80 00 e-mail: post@epd-norge.no web: www.epd-norge.no
	Owner of the declaration NC Nordic Care AB Ydrevägen 23, Box 30 SE 573 21 Tranås	Phone: +46 140 38 40 60 e-mail: moa.u@ncnordiccare.se web: www.ncnordiccare.se
	Author of the Life Cycle Assessment LCA.no AS Dokka 6B 1671 Kråkerøy	Phone: +47 916 50 916 e-mail: post@lca.no web: www.lca.no
	Developer of EPD generator LCA.no AS Dokka 1C 1671 Kråkerøy	Phone: +47 916 50 916 e-mail: post@lca.no web: www.lca.no